



Moulded Case Circuit Breakers

DU Series

About us

Larsen & Toubro is a technology-driven company that infuses engineering with imagination. The Company offers a wide range of advanced solutions in the field of Engineering, Construction, Electrical & Automation, Machinery and Information Technology.

L&T Switchgear, a part of the Electrical & Automation business, is India's largest manufacturer of low voltage switchgear, with the scale, sophistication and range to meet global benchmarks. With over five decades of experience in this field, the Company today enjoys a leadership position in the Indian market with a growing international presence.

It offers a complete range of products including powergear, controlgear, industrial automation, building electricals & automation, reactive power management, energy meters, and protective relays. These products conform to Indian and International Standards.



Switchgear Factory, Baroda

Index

Description	Page No.
Introduction	2
Salient Features	2
Technical Specifications	3
I-T Characteristics Curves	4
Overall Dimensions	5

Introduction

The DU Series, a new generation of MCCBs, stands out due to its state-of-the-art design, contemporary user-friendly features, ergonomics, aesthetics and compactness.


DU100H/DU250 Series complies with the latest standards like IEC 60947-2, EN 60947-2 & IS/IEC 60947-2. The products conform to international standards, carry CE marking and are *KEMA* & CB certified. The range is specially designed for tropical conditions, ensuring reliable performance at high ambient and humid environments. The range can satisfy the most demanding system requirements.

The DU Series, has a wide range of accessories, ensuring operational safety, reliability and versatility.

Salient Features

Technology

- Specially designed arc suction effect & speedo quench contact system
- No load line bias: Either side of MCCB terminal can be used as load and line*



Ergonomic design & user friendliness

- Knob designed for better grip
- Color indication of ON/TRIP/OFF*
- Current rating on the knob
- Overload adjustment from front*
- Easy ON/OFF/RESET operations
- Wide variety of snap fit accessories*



Compact

- Compact size
- Common depth throughout the range
- Suitable for side by side mounting
- Suitable for use in Distribution Board



Internal Accessories

- Auxiliary contacts
- Trip alarm contacts*
- Combined Auxiliary + Trip alarm contacts*
- Shunt release
- Under Voltage release*



External Accessories

- Direct & Extended ROM
- Spreader links
- Padlock is available (with ROM)
- SS Enclosure**
- GF module for earth fault protection




Easy to Install

- 45mm door cutout*
- Optional DIN rail mounting available**



Safe to Use

- Finger proof terminals
- Lockable shroud on thermal knob to prevent unauthorized operation*
- CE marked range*
- Double Insulation: The internal accessories are housed in insulated casings to ensure first level of insulation. When the front cover is opened for the fixing of internal accessories, the MCCB is totally insulated ensuring the double insulation*



* For DU100H & DU250 3P & 4P MCCBs

** For DU100 & DU100H

Technical Specifications




DU Series


Technical Parameters		Specification		
Type Designation		DU100	DU100H	DU250
No. of Poles		3	2/3/4	3/4
Rated Current	I_n (A)	16,20,25,32,40,50,63,80,100	20,25,32,40,50,63,80,100	100,125,160,200,250
Impulse withstand voltage	U_{imp} (kV)	6		
Rated operational voltage	U_e (V)	415		
Rated insulation voltage	U_i (V)	690		
Operational frequency (Hz)		50 / 60		
Utilisation Category		A		
Reference Temperature		50° C	40°C	
Operating Temperature		-5°C to + 55°C		
I _{cu} (kA)	240V a.c.	25	65	65
	415V a.c.	10	30	36
	250V d.c (3P in series) L/R<15 msec	5	15	15
	500V d.c. (3P in series) L/R<15 msec	-	5	5
Rated Service S. C. Breaking Capacity (I _{cs})		50% of I _{cu}		
Mechanical Life	No. of operations	20000	30000	10000
Electrical Life	No. of operations	6000	4000	3000
IP Protection (from front side)		IP40		
Pollution Degree		III		
Type of Release		Thermal - Magnetic		
Thermal		Fixed	Variable (0.8 - 1.0I _n)	
Magnetic		Fixed (9I _n)		
Terminal Capacity (without spreaders)				
Cables with Lug (mm ²)		50	35	120
Link (mm)		<17		<26
Overall Dimensions				
Width (mm)		75	75/75/100	105/140
Height (mm)		130	130	165
Mounting Depth (mm)		60	60	60
Weight (2/3/4 Pole) (kg)		0.68	0.6/0.73/1	1.45/1.8

I-T Characteristics Curves

DU100/DU100H

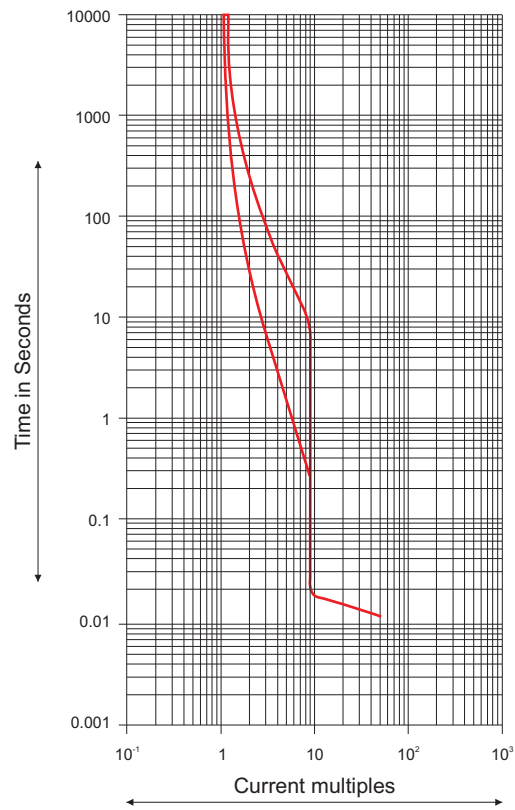


DU250

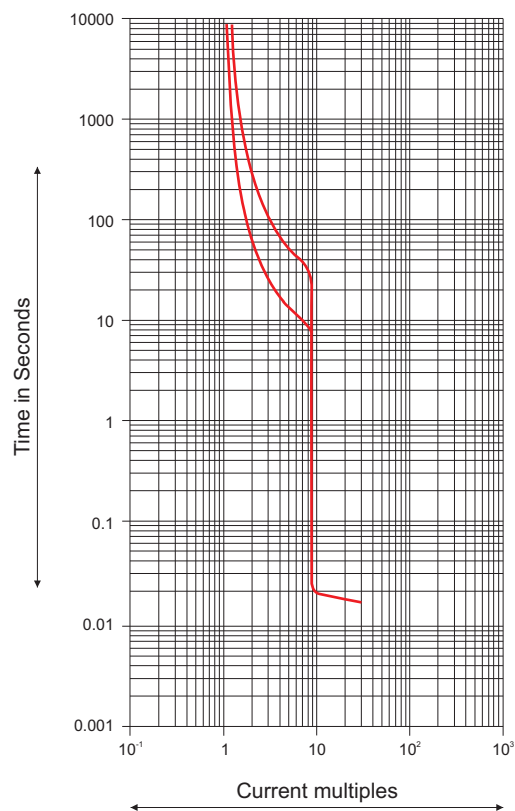


Overall Dimensions

DU100


3-Pole

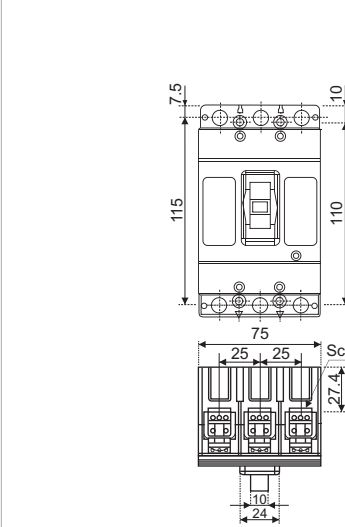

3-Pole with spreaders

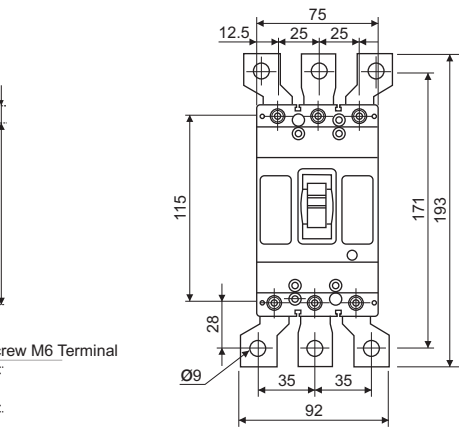


3-Pole

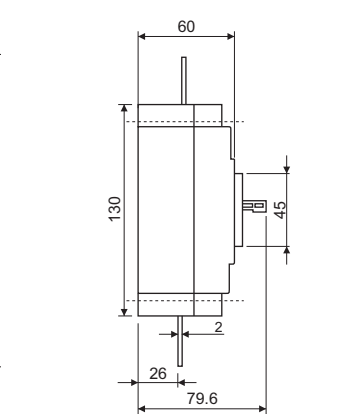


DU100H


3-Pole, 4-Pole

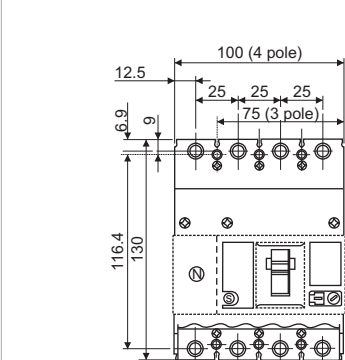


3-Pole with spreaders

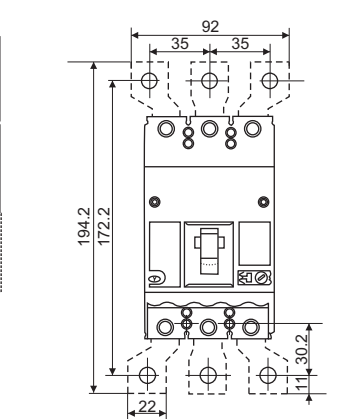

4-Pole with spreaders

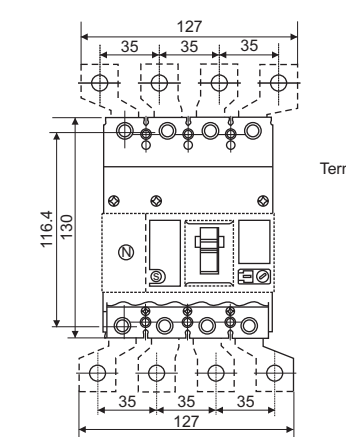


3-Pole, 4-Pole

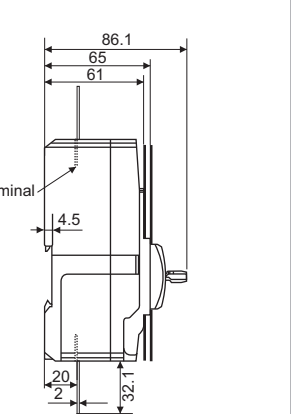


For 2-Pole MCCB, refer 3-Pole dimensions. Spreader links are available as spare. It is recommended to use spreader links for enhancing termination capacity.

DU250


3-Pole, 4-Pole

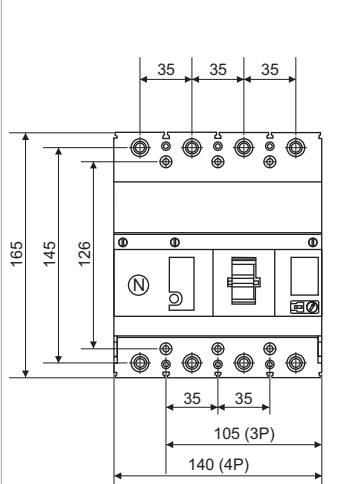


3-Pole with spreaders

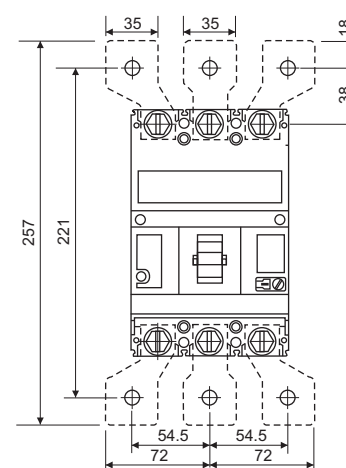

4-Pole with spreaders

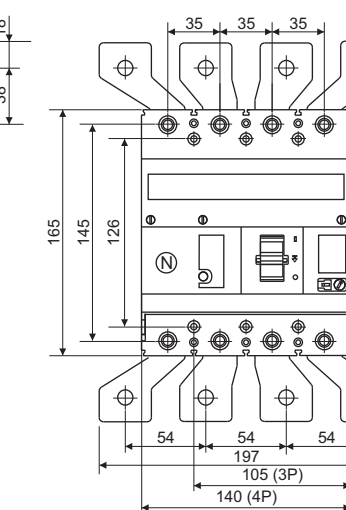


3-Pole, 4-Pole

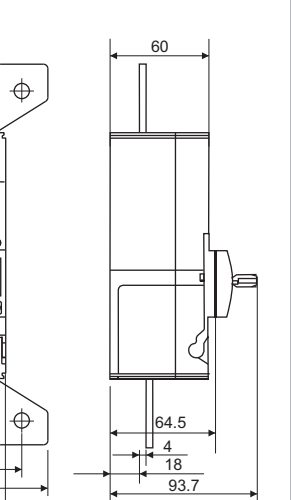


Spreader links are available as spare. It is recommended to use spreader links for enhancing termination capacity.

Panel Cut-out Dimension


DU100

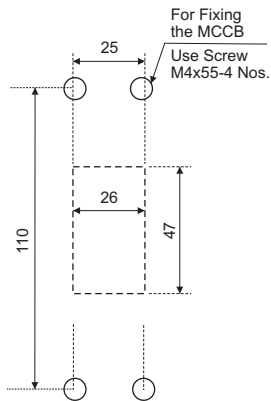

DU100H

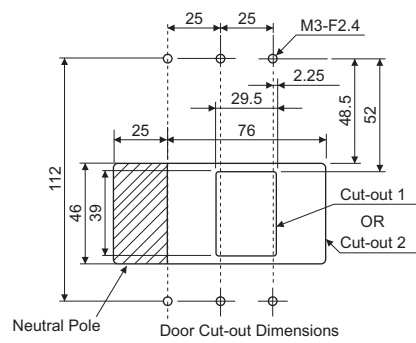


DU250

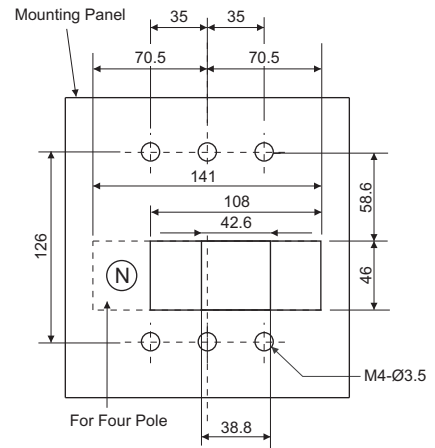

ROM Mounting Dimension




Direct ROM

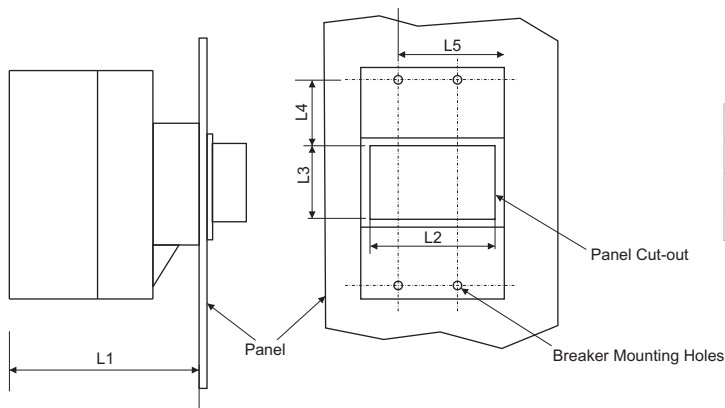

Type	L1	L2	L3	L4	L5
DU100	133	-	-	-	-
DU100H	96.5	58	52	44	37
DU250	96.5	75	52	56.5	55

L1 = Mounting Depth
L2/L3 = Panel Cut-out
L4/L5 = Breaker Mounting Reference

Extended ROM

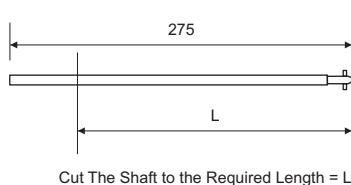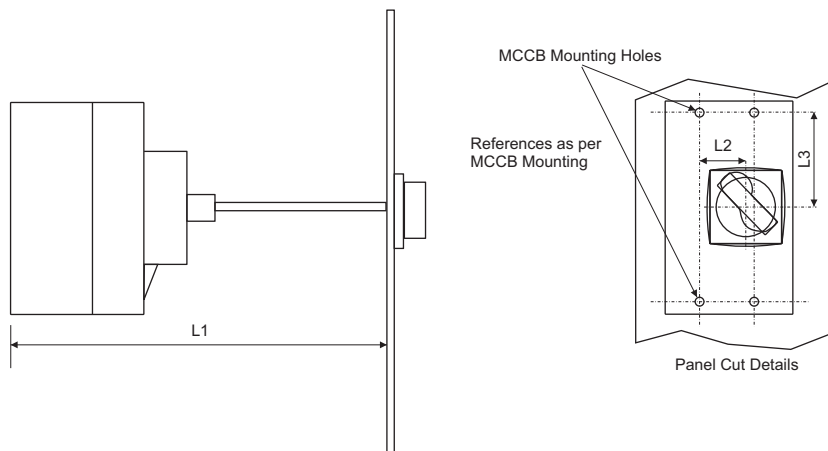

Type	L1	L	L2	L3
DU100H	169	L1-119	7.5	69.5
DU250	169	L1-119	24.5	81.7

L = Length of Shaft required for Panel Depth L1 (mm)
L1 = Min. Panel depth (mm)

Electrical Standard Products (ESP) Branch Offices:

REGISTERED OFFICE AND HEAD OFFICE

L&T House, Ballard Estate
P. O. Box 278
Mumbai 400 001
Tel: 022-67525656
Fax: 022-67525858
Website: www.Larsentoubro.com

ELECTRICAL STANDARD PRODUCTS (ESP)

501, Sakar Complex I
Opp. Gandhigram Rly. Station
Ashram Road
Ahmedabad 380 009
Tel: 079-66304006-11
Fax: 079-66304025
e-mail: esp-ahm@LNTEBG.com

38, Cubbon Road, P. O. Box 5098
Bangalore 560 001
Tel: 080-25020100 / 25020324
Fax: 080-25580525
e-mail: esp-blr@LNTEBG.com

131/1, Zone II
Maharana Pratap Nagar
Bhopal 462 011
Tel: 0755-3080511 / 3080508
Fax: 0755-2559264
e-mail: esp-bho@LNTEBG.com

Plot No. 559, Annapurna Complex
Lewis Road
Bhubaneswar 751 014
Tel: 0674-6451342, 2436696
Fax: 0674-2537309
e-mail: esp-bbi@LNTEBG.com

SCO 32, Sector 26-D
Madhya Marg, P. O. Box 14
Chandigarh 160 019
Tel: 0172-4646840, 4646853
Fax: 0172-4646802
e-mail: esp-chd@LNTEBG.com

L&T Construction Campus
TC-1 Building, II Floor
Mount-Poonamallee Road
Manapakkam
Chennai 600 089
Tel: 044-2270 6800
Fax: 044-22706940
e-mail: esp-maa1@LNTEBG.com

67, Appuswamy Road
Post Bag 7156
Opp. Nirmala College
Coimbatore 641 045
Tel: 0422-2588120 / 1 / 5
Fax: 0422-2588148
e-mail: esp-cbe@LNTEBG.com

Khairasol, Degaul Avenue
Durgapur 713 212
Tel: 2559848, 2559849, 2559844
Fax: 0343-2553614
e-mail: esp-dgp@LNTEBG.com

Milanpur Road, Bamuni Maidan
Guwahati 781 021
Tel: 0361-2550562 / 65
Fax: 0361-2551308
e-mail: hazrasudipto@LNTEBG.com

II Floor, Vasantha Chambers
5-10-173, Fateh Maidan Road
Hyderabad 500 004
Tel: 040-67015052
Fax: 040-23296468
e-mail: esp-hyd@LNTEBG.com

Monarch Building, 1st Floor
D-236 & 237, Amrapali Marg
Vaishali Nagar
Jaipur 302 021
Tel: 0141-4385914 to 18
Fax: 0141-4385925
e-mail: esp-jai@LNTEBG.com

Akashdeep Plaza, 2nd Floor
P. O. Golmuri
Jamshedpur 831 003
Jharkhand
Tel: 0657-2312205 / 38
Fax: 0657-2341250
e-mail: esp-jam@LNTEBG.com

Skybright Bldg; M. G. Road
Ravipuram Junction, Ernakulam
Kochi 682 016
Tel: 0484-4409420 / 4 / 5 / 7
Fax: 0484-4409426
e-mail: esp-cok@LNTEBG.com

3-B, Shakespeare Sarani
Kolkata 700 071
Tel: 033-44002572 / 3 / 4
Fax: 033-22821025 / 7587
e-mail: esp-ccu@LNTEBG.com

A28, Indira Nagar, Faizabad Road
Lucknow 226 016
Tel: 0522-4929905/04
Fax: 0522-2311671
e-mail: esp-lko@LNTEBG.com

No: 73, Karpaga Nagar, 8th Street
K. Pudur
Madurai 625 007
Tel: 0452-2537404, 2521068
Fax: 0452-2537552
e-mail: esp-mdu@LNTEBG.com

EBG North Wing Office-Level 2
Gate 7, Powai Campus
Mumbai 400 072
Tel: 022-67052874 / 2737 / 1156
Fax: 022-67051112
e-mail: esp-bom@LNTEBG.com

12, Shivaji Nagar
North Ambazari Road
Nagpur 440 010
Tel: 0712-2260012 / 3
Fax: 0712-2260020 / 30
e-mail: esp-nag@LNTEBG.com

32, Shivaji Marg
P. O. Box 6223
New Delhi 110 015
Tel: 011-41419514 / 5 / 6
Fax: 011-41419600
e-mail: esp-del@LNTEBG.com

L&T House
P. O. Box 119
191/1, Dhole Patil Road
Pune 411 001
Tel: 020-26164048
Fax: 020-26164048/26164910
e-mail: esp-pnq@LNTEBG.com

Crystal Tower, Plot No. 606/1
4th Floor, G. E. Road
Telibandha
Raipur - 492 006
Tel: 0771-4283214
e-mail: esp-raipur@LNTEBG.com

3rd Floor
Vishwakarma Chambers
Majura Gate, Ring Road
Surat 395 002
Tel: 0261-2473726
Fax: 0261-2477078
e-mail: esp-sur@LNTEBG.com

Radhadaya Complex
Old Padra Road
Near Charotar Society
Vadodara 390 007
Tel: 0265-6613610 / 1 / 2
Fax: 0265-2336184
e-mail: esp-bar@LNTEBG.com

48-8-16, Dwarakanagar
Visakhapatnam 530 016
Tel: 0891-670 1125 to 1130
Fax: 0891- 670 1139
e-mail: esp-viz@LNTEBG.com

Product improvement is a continuous process. For the latest information and special applications, please contact any of our offices listed here.



Larsen & Toubro Limited
Electrical Standard Products
Powai Campus, Mumbai 400 072
Customer Interaction Center (CIC)
BSNL / MTNL (toll free) : 1800 233 5858
Reliance (toll free) : 1800 200 5858
Tel : 022 6774 5858, Fax : 022 6774 5859
E-mail : cic@LNTEBG.com
Website : www.LNTEBG.com